


TOOL FEATURES

1. Steel hammer exhaust.
 2. Rubber protection pad protects work surface.
 3. Hidden depth adjust knob with investment -casted cover.
 4. Aluminum ergonomic frame over-molded handle grip.
 5. Enlarged rear reservoir minimizes staple stair stepping.
 6. Tool-free rear jam clearance rear exhaust minimizes downtime and maximizes tool durability & operation comfort.
- All metal housing and structure .
 - High speed operation, 15~20 cycles/second.
 - One-piece aluminum cylinder design.
 - Compact engine boosts maneuverability.
 - Pneumatic power adjustment knob.
 - Full automatic version available : **SN41S5A**
 - Two trigger options available :
SN41S5-ST (sequential) / SN41S5-CT (contact)



FASTENER SPECS

Type	40mm 16 & 17 GA. Bostitch BCS5 / Senco N / BeA 155
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	10.6~11.1mm (7/16")
C	1.6 x 1.4mm (0.062" x 0.055") 1.45 x 1.3mm (0.057" x 0.051")

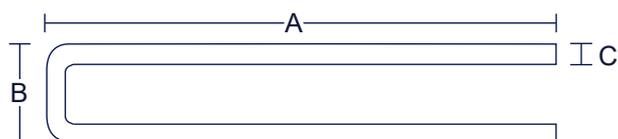

TOOL SPECS

Weight	2.0 kgs (4.4 lbs)
Height	225mm (8.8")
Width	64mm (2.5")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	176~237 In-lbs @100 psi
Applications	Pallet, Furniture Frame, Vinyl Siding, Framing, Sheathing

